

Turbovac Table Top Range

1st choice for professionals within
the food and packaging industry

Plug & Play
with options to upgrade



Table Top Range



Specifications

	S20	S30	S40
Cover	Flat	High	High
Seal	Single	Double	Double
Machine dimension mm	371 x 500 x 340	425 x 550 x 410	530 x 590 x 460
Standard voltage	220-240 - 1 - 50/60 Hz	220-240 - 1 - 50/60 Hz	220-240 - 1 - 50/60 Hz
Digital time control	1 Program	1 Program	1 Program
Pump Capacity	4 m ³	8 m ³	16 m ³
Average weight	27 kg	41 kg	55 kg

	S50	S60
Cover	Flat	High
Seal	Double	Double
Machine dimension mm	990 x 520 x 440	625 x 610 x 481
Standard voltage	220-240 - 1 - 50 Hz	220-240 - 1 - 50/60 Hz
Digital time control	1 Program	1 Program
Pump Capacity	21 m ³	16 m ³
Average weight	102 kg	85 kg







Options

	S20	S30	S40
Filler plates / Liquid filler plates	Yes	Yes	Yes
Digital time control	x	10 Programs	10 Programs
Sensor control	x	Sensor / H ₂ O	Sensor / H ₂ O
Soft Air	x	Soft air	Soft air
Seal	x	Trenn (pre-cut)	Trenn (pre-cut)
Gas	x	Gas	Gas
Pump upgrade	8 m ³	16 m ³	21 m ³
Voltage according to Pump upgrade	220-240 - 1 - 50/60 Hz	220-240 - 1 - 50/60 Hz	220-240 - 1 - 50 Hz

	S50	S60
Filler plates / Liquid filler plates	Yes	Yes
Digital time control	10 Programs	10 Programs
Sensor control	Sensor / H ₂ O	Sensor / H ₂ O
Soft Air	Soft air	Soft air
Seal	Trenn (pre-cut)	Trenn (pre-cut)
Gas	Gas	Gas
Pump upgrade	x	21m ³
Voltage according to Pump upgrade	x	220-240 - 1 - 50 Hz



Seal configurations

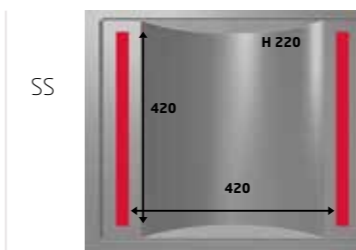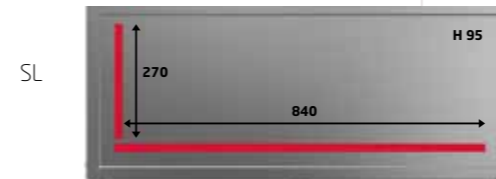

Visit our website:



Turbovac

Het Sterrenbeeld 36
5215 ML 's-Hertogenbosch
The Netherlands

Phone: +31 (0) 73 627 12 71

Email: sales@Turbovac.nl

www.Turbovac.nl

Copyright Turbovac 2019