

Dati Tecnici - Specifications

	cond	comp. W	ABS. W	A / Fuse	Kwh/100Kg	I / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
E85 A		1250	620	10	20,6	7,44	55	121	63	139	0,31
E85 W		1250	450	10	12,4	50,4	54	119	62	136	0,46



Produzione Ghiaccio - Ice Production


Raffreddamento ad aria - Air Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
		32°	21°	15°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	71	79	82	85
50°	157	174	181	187
21°	66	73	76	78
70°	146	161	168	172
32°	54	59	61	63
90°	119	130	134	139
38°	46	49	51	53
100°	101	108	112	117


Raffreddamento ad acqua - Water Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
		32°	21°	15°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	66	75	78	81
50°	146	165	172	179
21°	64	70	75	77
70°	141	154	165	170
32°	61	68	72	74
90°	134	150	159	163
38°	56	64	68	70
100°	123	141	150	154


Vista frontale
Front view

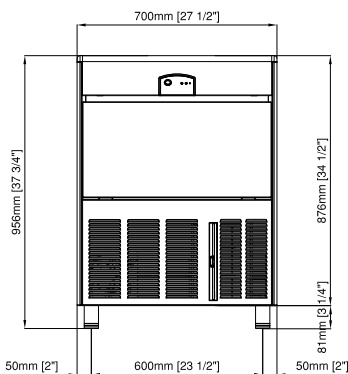


Vista laterale
Lateral view

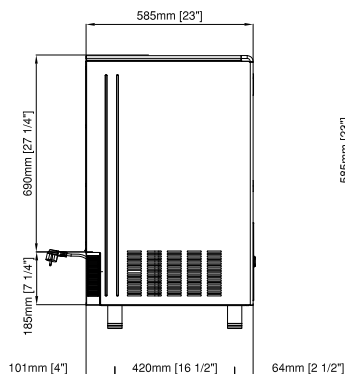

Vista superiore
Top view




Vista posteriore
Back view

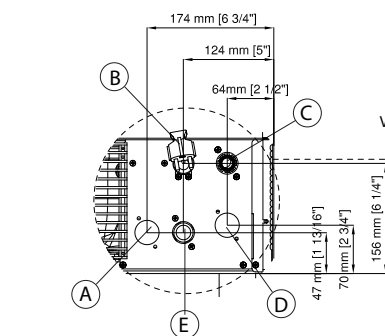


- A** OPTIONAL - Entrata acqua condensatore ad acqua - 3/4"gas
OPTIONAL - Water inlet connection water condensation - 3/4"gas
- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua diam. 20 mm
Water outlet connection
- D** Uscita acqua condensatore ad acqua diam. 20 mm
Water outlet connection water condensation
- E** Attacco entrata acqua - 3/4"gas
Water inlet connect - 3/4"gas

Circolazione aria
Air circulation



PANNELLO DI CONTROLLO - CONTROL PANEL

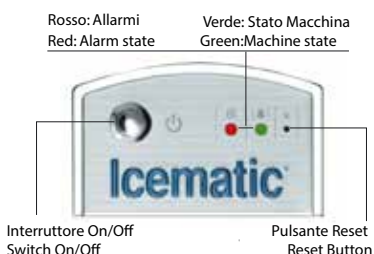

CAPACITA' DEPOSITO - BIN CAPACITY


36 Kg - 79 lbs | 2117 pcs

DIMENSIONI - DIMENSIONS

LxPxH (mm)
700 x 585 x 956

WxDxH (inch)
27 8/16" x 23 1/16" x 37 10/16"

TIPO GHIACCIO - ICE TYPE



17g
PESO GHIACCIO
WEIGHT ICE



60
PZ/CICLO
PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS



220-240/1/50Hz | R134a GWP=1430

MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 Bar (14 psi)	5 Bar (70 psi)