
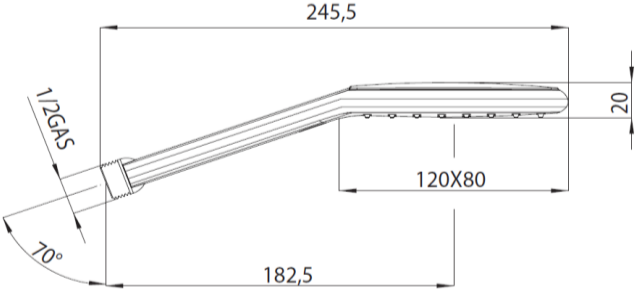
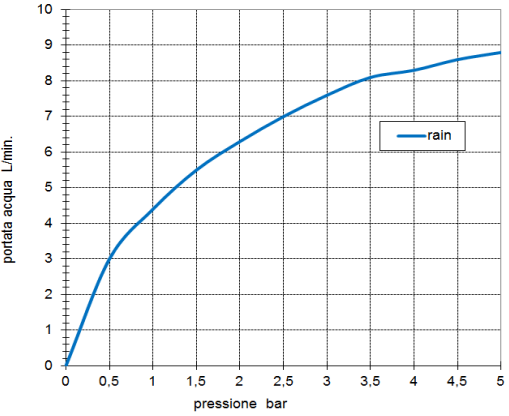


BOSSINI		SCHEDA TECNICA TECHNICAL SHEET		Date: 18/07/2017	Rev/0																								
<b>Codice / Code:</b> <b>B00174</b>		<b>Descrizione / description:</b> Doccia monogetto 120 x 80 mm - con sistema Fitair Single function handshower 120 x 80 mm - with Fitair system																											
<b>Foto / image</b>		<b>Disegni / drawings</b>																											
																													
<b>Grafico di portata / Flow rate diagram</b>																													
<table border="1"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>3</td></tr> <tr><td>1</td><td>4,4</td></tr> <tr><td>1,5</td><td>5,5</td></tr> <tr><td>2</td><td>6,3</td></tr> <tr><td>2,5</td><td>7</td></tr> <tr><td>3</td><td>7,6</td></tr> <tr><td>3,5</td><td>8,1</td></tr> <tr><td>4</td><td>8,3</td></tr> <tr><td>4,5</td><td>8,6</td></tr> <tr><td>5</td><td>8,8</td></tr> </tbody> </table>			rain	0	0	0,5	3	1	4,4	1,5	5,5	2	6,3	2,5	7	3	7,6	3,5	8,1	4	8,3	4,5	8,6	5	8,8				
	rain																												
0	0																												
0,5	3																												
1	4,4																												
1,5	5,5																												
2	6,3																												
2,5	7																												
3	7,6																												
3,5	8,1																												
4	8,3																												
4,5	8,6																												
5	8,8																												
pressione <b>bar</b>		portata <b>L/min</b>																											
<b>MATERIALI / materials</b>																													
ABS, Silicone, Nbr, Acetal																													
<b>CARATTERISTICHE IDRAULICHE / hydraulic features</b>																													
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																									
min	<b>1 bar</b>	<b>5L/min</b>	--	Blocco di sicurezza safety lock	/																								
max	<b>5 bar</b>	--	<b>&lt;70°C</b>	Temperatura acqua fredda cold water temperature	/																								
consigliata recommended	<b>2-3 bar</b>	--	<b>&lt;42°C</b>	Temperatura acqua calda hot water temperature	/																								
<b>CERTIFICAZIONI / CERTIFICATIONS:</b>																													
ACS(FRA), NF [EN 1112] (FRA), WATERMARK [AS/NZS 3662:2005] (AUS)																													
<b>CONFORMITA' / CONFORMITY :</b>																													
Chrome plating - EN 248.																													