


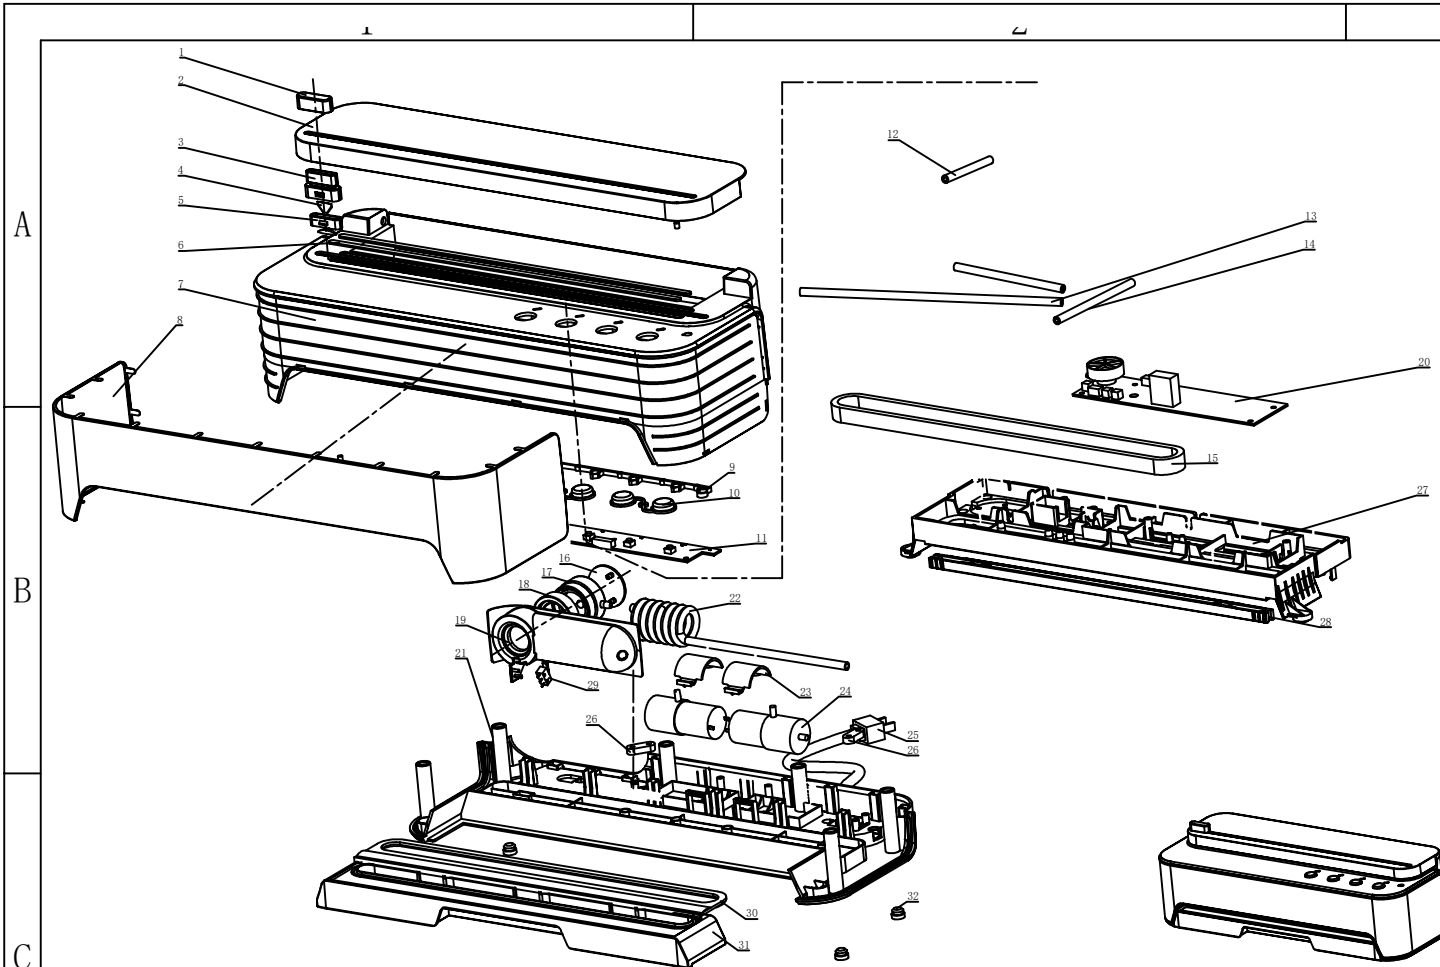

修订记录		
版本	描述	日期

32	Rubber pad	Rubber pad RoHS X3J109 silica gel black	4
31	Vacuum chamber	ABS black fine abrasive 347.9 * 51.9 * 21.8	1
30	Heat resistant silica gel	Silicone black 324 * 64 * 4mm	1
29	Micro switch	Microswitch RoHS KG070 V2 300mm	1
28	Heating wire components		1
27	Upper cover - lower	HIPS black fine abrasive 407.3 * 150.3 * 52.5	1
26	Pressure line code	HIPS black 22 * 9 * 4.8	2
25	Power cord	RVV52 2G0.75/300V 1800mm 187 straight plug	1
24	Vacuum pump	DC2430PD02 12V 150mm	2
23	Cover of vacuum pump	HIPS black 40.4 * 25 * 16.5	2
22	Bourdon tube of outside pumping	PU transparent W66*480324294L#7T	1
21	Lower cover	HIPS black fine abrasive 407.3 * 150.3 * 52.5	1
20	Power supply board		1
19	Groove of outside pumping	ABS black bright surface 128.5 * 54.5 * 26	1
18	Silica gel of outside pumping	Silicone black 0 36.1 * 10	1
17	Outside pumping tube	HIPS black fine matte 45.3 * 37.2 * 20	1
16	Cover of outside pumping tube	HIPS black fine matte 33.6 * 33.6 * 6.8	1
15	Sealing cotton	EVA black 0 15 * 3 gum 3M	1
14	Water pipe	Silica gel white 100mm	2
13	Water pipe	Silica gel white 210mm	1
12	Water pipe	Silica gel white 60mm	2
11	Control panel		1
10	Button	ABS primary color silver electroplating 61.7 * 24.5 * 7.5	2
9	Light guide column	PC opalescent translucent 151.2 * 15.1 * 6.1	1
8	Stainless iron	430 stainless steel wire drawing oil 407.6 * 119.4 * 86.8	1
7	Bag cutting anti-skid silicone strip	Silicone black backing 3M 5 * 5 * 325	2
6	Cutter housing - lower	HIPS black 26.9*6.9*14	1
5	Blade	Carbon steel 13 * 8 * 0.3	1
4	Cutter housing - upper	HIPS black 30*10*22.6	1
3	Magnet	Neodymium iron boron RoHS CT008	1
2	Cutter cover	HIPS black fine matte	1
1	Cutter housing cover	ABS primary color silver electroplating	1

No.	Name		Specifications			QTY
量	版本	A/O	比例	1:1	成品名称	V2真空封口机爆炸图
7	视图		单位	MM	成品编码	5303310007
	广东英为拓科技有限公司 GUANGDONG INVITOP TECHNOLOGY CO.,LID.					

技术要求

- 1、整机规格:100-240V/50-60Hz 110W;
- 2、整机装配后开关应操作灵敏,不得有接触不良现象;
- 3、内部接线正确、牢固,布线整齐,接线处不得有铜丝外露现象;
- 4、整机符合RoHS要求;
- 5、装配后美工线均匀,不得有错位、离缝现象;
- 6、所有胶件外观面不得有划花、顶白等缺陷,
- 7、所有螺钉不得有滑牙、扫头等缺陷;
- 8、所有不锈钢装饰片不得有油渍、凸点、凹坑等影响外观的缺陷。

序号	名称	规格	用量
	设 计	张峰	2022.04.27
	审 核		
	批 准		

版本	A/0	比例	1:1	成品名称	V2真空封口机爆炸图
视图		单位	MM	成品编码	5303310007
广东英为拓科技有限公司 GUANGDONG INVITOP TECHNOLOGY CO.,LID.					