


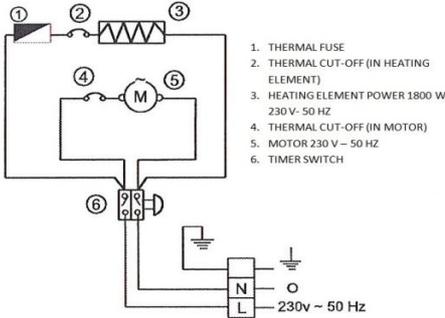

TECHNICAL DATA SHEET

NAME	REFERENCE
PUSH BUTTON OPERATED HAND DRYER FUTURA SATIN STAINLESS STEEL	AA15000
DESCRIPTION	
HIGH QUALITY AND PERFORMANCE STANDARD HAND DRYER EXCELLENT PRICE-PERFORMANCE RATIO MANUAL PUSH BUTTON AND AUTOMATIC STOP SECURITY SYSTEM WITH TIMER HIGH QUALITY SATIN STAINLESS STEEL COVER	
ELECTRICAL SCHEME	
 <p>1. THERMAL FUSE 2. THERMAL CUT-OFF (IN HEATING ELEMENT) 3. HEATING ELEMENT POWER 1800 W 230 V - 50 HZ 4. THERMAL CUT-OFF (IN MOTOR) 5. MOTOR 230 V - 50 HZ 6. TIMER SWITCH</p>	EAN CODE 8427950304361

CHARACTERISTICS				
NET (Without packaging)	DIMENSIONS (mm)	HEIGHT: 318	WIDTH: 226	DEPTH: 150
	WEIGHT (Kg)	3,600		
GROSS (with packaging)	DIMENSIONS (mm)	HEIGHT: 380	WIDTH: 290	DEPTH: 225
	WEIGHT (Kg)	4,145		
MATERIALS	STAINLESS STEEL COVER AISI 304 INTERNAL COMPONENTS: ABS Y POLYCARBONATE "V0" PUSH BUTTON: ZAMAK			
COLOUR / FINISH	COVER: SATIN STAINLESS STEEL PUSH BUTTON : CHROME PLATING FINISH AIR OUTLET GRILLE: BLACK			
ELECTRICAL FEATURES	VOLTAGE: 230V. AC FREQUENCY: 50 Hz. CONSUMPTION: 8,5 Amp. MOTOR POWER: 140 W. HEATING ELEMENT POWER: 1820 W. TOTAL POWER: 1960 W. MOTOR RPM: 2800		AIR SPEED: 68 Km/HOUR EFFECTIVE AIR FLOW: 250 m³/HOUR SOUND PRESSURE: 58 Db. AIR TEMPERATURE: 55° C(At a distance of 10 cm) ELECTRICAL INSULATION: CLASS I CERTIFICATIONS: CE, TÜV AND GS PROTECTION RATIO: IPX1	
FIXING SYSTEM	BY MEANS OF FOUR SCREWS AND FOUR WALL PLUGS - INCLUDED			
PACKAGING	SINGLE UNIT PACKAGING		Approved by : Quality Control Dept	
			DATE: 12/05/2015	