


MMD-AP0184SPH-E Slim Ducted


- Very slim design only 21cm height.
- External static pressure up to 48 pa.
- Quiet operation with automatic air flow control.
- Lift Pump (850mm).
- Long Life washable filter.
- Base or Rear return air.



Model Reference	MMD-AP0184SPH-E
Nominal Cooling kW	5.6
Nominal Heating kW	6.3
Capacity Code	2.0
Power Input	0.054
Air Flow (H/L) l/s	217/161
Airflow (H/L) m3/h	780/580
Sound Power Level (H/M/L) dB(A) ¹	55/52/48
Sound Pressure Level (H/M/L) dB(A) ¹	40/38/36
Sound Power Level (H/M/L) dB(A) ²	48/46/44
Sound Pressure Level (H/M/L) dB(A) ²	33/31/29
Dimensions (HxWxD) mm	210/845/645
Weight kg	23
Running Current A	0.39
Starting Current A	0.68
Suggested Fuse A	3
Power Supply V-ph-Hz	220/240-1-50
Pipe Connection, Gas mm(In)	12.7 (1/2")
Pipe Connection, Liquid mm(In)	6.4 (1/4")

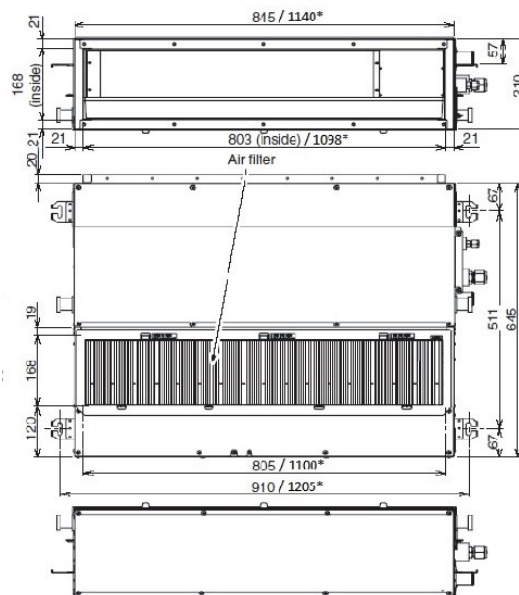

* MMD-AP0244SPH-E & MMD-AP0274SPH-E

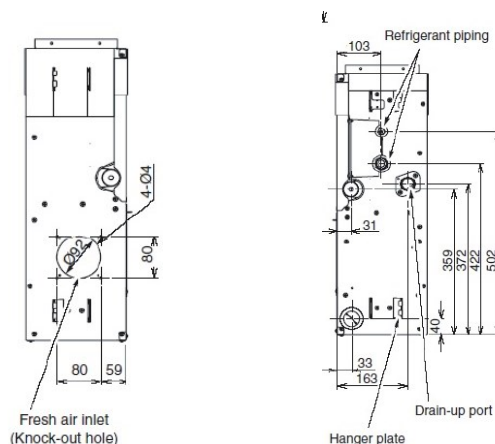

¹ Sound Power Level / Sound Pressure Level Bottom Air Inlet

² Sound Power Level / Sound Pressure Level Rear Air Inlet